

KL80FQ

Prime - 65 kW Standby - 72 kW Total Amps - 678

MEGA SILENT SERIES



With a unique design that contains and eliminates sound, the Mega Silent series is 2x as quiet as competitors. For the entertainment, events and movie sectors, the Mega Silent Series has the largest range of prime power in its class with 80% more models. Standard features on all models include Deep Sea controller, camlocks, block heater, battery charger and external fuel connect.






KL80FQ SPECIFICATIONS

GENERATOR SPECS	
PRIME (kW)	65
STANDBY (kW)	72
RPM	1800
VOLTAGE 1PH	240/120V
VOLTAGE 3PH	480/277V
	208/120V
FREQUENCY (Hz)	60
CONTROLLER BRAND	Deep Sea
CONTROLLER MODEL	DSE7310
ALTERNATOR MAKE	Leroy Somer
ALTERNATOR MODEL	LSA 44.3S3
SYSTEM VOLTAGE	12V
SOUND LEVEL @ 23 FEET	55
AMPS	
SINGLE PHASE 120V zz (P.F. 0,8)	217 X 2 zz
SINGLE PHASE 240V (P.F. 0,8)	217
THREE PHASE 208V (P.F. 0,8)	226
THREE PHASE 240V (P.F. 0,8)	195
THREE PHASE 480V (P.F. 0,8)	98
, , ,	
ENGINE SPECS	
	Kohler
ENGINE SPECS	Kohler KDI3404TCR
ENGINE SPECS MAKE	
ENGINE SPECS MAKE MODEL	KDI3404TCR
ENGINE SPECS MAKE MODEL EPA LEVEL	KDI3404TCR Tler 4F
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders	KDI3404TCR Tler 4F 4
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP	KDI3404TCR Tler 4F 4 100
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE	KDI3404TCR Tler 4F 4 100 YES
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT	KDI3404TCR Tler 4F 4 100 YES
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION	KDI3404TCR Tler 4F 4 100 YES 110%
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons)	KDI3404TCR Tler 4F 4 100 YES 110%
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75%	KDI3404TCR Tler 4F 4 100 YES 110% 79 3.21 gal/h
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75%	KDI3404TCR Tler 4F 4 100 YES 110% 79 3.21 gal/h
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF	KDI3404TCR Tler 4F 4 100 YES 110% 79 3.21 gal/h 25
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons)	KDI3404TCR Tler 4F 4 100 YES 110% 79 3.21 gal/h 25
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS	KDI3404TCR Tler 4F 4 100 YES 110% 79 3.21 gal/h 25
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER	KDI3404TCR TIer 4F 4 100 YES 110% 79 3.21 gal/h 25 4.23
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER Dry WEIGHT (lbs.)	KDI3404TCR Tler 4F 4 100 YES 110% 79 3.21 gal/h 25 4.23
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER Dry WEIGHT (lbs.) Wet WEIGHT (lbs.)	KDI3404TCR TIer 4F 4 100 YES 110% 79 3.21 gal/h 25 4.23 4322 4911
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER Dry WEIGHT (lbs.) Wet WEIGHT (lbs.)	KDI3404TCR Tier 4F 4 100 YES 110% 79 3.21 gal/h 25 4.23 4322 4911 101

VSI TECHNOLOGY - Standard

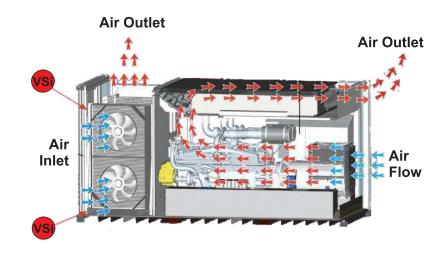

The FQ series generators by TecnoGen incorporate their Patented VSi technology. VSi (Variable Speed invertor) technology uses variable speed electric fans to manage the cooling for the generator instead of standard engine driven fans, which steal power from the engine and create excessive noise.

The specially designed FQ canopies and containers are designed to meet max operating temperature of 130° F at continuous load. By using the VSi technology to adjust the fans to only cool as necessary to maintain proper temperature, TecnoGen creates one of the most fuel efficient generators on the market, not to mention the quietest!







