

VO725FQ

Prime - 572 kW Standby - 630 kW Total Amps - 5,961

MEGA SILENT SERIES



With a unique design that contains and eliminates sound, the Mega Silent series is 2x as quiet as competitors. For the entertainment, events and movie sectors, the Mega Silent Series has the largest range of prime power in its class with 80% more models. Standard features on all models include Deep Sea controller, camlocks, block heater, battery charger and external fuel connect.






VO725FQ SPECIFICATIONS

GENERATOR SPECS	
PRIME (kW)	572
STANDBY (kW)	630
RPM	1800
VOLTAGE 1PH	N/A
	480/277V
VOLTAGE 3PH	208/120V
FREQUENCY (Hz)	60
CONTROLLER BRAND	Deep Sea
CONTROLLER MODEL	DSE8610
ALTERNATOR MAKE	Leroy Somer
ALTERNATOR MODEL	LSA 49.3S4
SYSTEM VOLTAGE	24V
SOUND LEVEL @ 23 FEET	64
AMPS	
SINGLE PHASE 120V zz (P.F. 0,8)	N/A
SINGLE PHASE 240V (P.F. 0,8)	N/A
THREE PHASE 208V (P.F. 0,8)	1987
THREE PHASE 240V (P.F. 0,8)	1722
THREE PHASE 480V (P.F. 0,8)	861
INKEE PHASE 460V (P.F. U,6)	001
ENGINE SPECS	001
	Volvo
ENGINE SPECS	
ENGINE SPECS MAKE	Volvo
ENGINE SPECS MAKE MODEL	Volvo TWD1673GE
ENGINE SPECS MAKE MODEL EPA LEVEL	Volvo TWD1673GE Tler 4F
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders	Volvo TWD1673GE Tler 4F 6
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP	Volvo TWD1673GE Tler 4F 6 809
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE	Volvo TWD1673GE Tler 4F 6 809 YES
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT	Volvo TWD1673GE Tler 4F 6 809 YES
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION	Volvo TWD1673GE Tler 4F 6 809 YES 110%
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons)	Volvo TWD1673GE TIer 4F 6 809 YES 110%
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75%	Volvo TWD1673GE Tler 4F 6 809 YES 110% 528 28.13 gal/h
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons)	Volvo TWD1673GE Tler 4F 6 809 YES 110% 528 28.13 gal/h
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS	Volvo TWD1673GE Tler 4F 6 809 YES 110% 528 28.13 gal/h 19
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER	Volvo TWD1673GE Tler 4F 6 809 YES 110% 528 28.13 gal/h 19
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER Dry WEIGHT (lbs.)	Volvo TWD1673GE Tler 4F 6 809 YES 110% 528 28.13 gal/h 19 42
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER Dry WEIGHT (lbs.) Wet WEIGHT (lbs.)	Volvo TWD1673GE TIer 4F 6 809 YES 110% 528 28.13 gal/h 19 42 20944 24991
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER Dry WEIGHT (lbs.) Wet WEIGHT (lbs.)	Volvo TWD1673GE Tler 4F 6 809 YES 110% 528 28.13 gal/h 19 42 20944 24991 197
ENGINE SPECS MAKE MODEL EPA LEVEL No. Cylinders GROSS HP EXTERNAL FUEL VALVE FUEL CONTAINMENT FUEL CONSUMPTION FUEL CAPACITY (Gallons) 75% RUN TIME @ 75% DEF DEF TANK CAPACITY (Gallons) WEIGHTS AND DIMENSIONS SKID W/O TRAILER Dry WEIGHT (lbs.) Wet WEIGHT (lbs.)	Volvo TWD1673GE TIer 4F 6 809 YES 110% 528 28.13 gal/h 19 42 20944 24991

VSI TECHNOLOGY - Standard

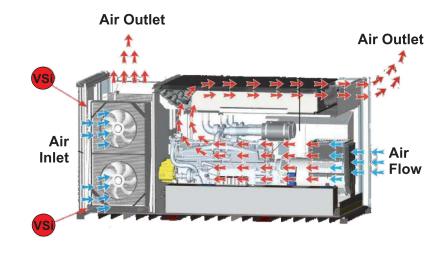

The FQ series generators by TecnoGen incorporate their Patented VSi technology. VSi (Variable Speed invertor) technology uses variable speed electric fans to manage the cooling for the generator instead of standard engine driven fans, which steal power from the engine and create excessive noise.

The specially designed FQ canopies and containers are designed to meet max operating temperature of 130° F at continuous load. By using the VSi technology to adjust the fans to only cool as necessary to maintain proper temperature, TecnoGen creates one of the most fuel efficient generators on the market, not to mention the quietest!







